mr Handsfree®
Blue Chameleon

Bluetooth® wireless headset

GB
NL
F
D
I
E
P

GR
RU
HU
HR

User`s manual

DECLARATION OF CONFORMITY

We, the undersigned,

Company:	TE-GROUP nv
Address:	Kapelsestraat 61, 2950 Kapellen - BELGIUM

declare, that the following equipment:

Product Name:	BLUE CHAMELEON
Product Type:	Bluetooth® headset

is in conformity with the Directions of the European Union

EC R&TTE Directive	1999/5/EC
EC Low Voltage Directive	72/23/EEC
EC EMC Directive	89/338/EEC

Conformity of the Bluetooth® headset with the above-mentioned directions is guaranteed by the CE-symbol.

CE

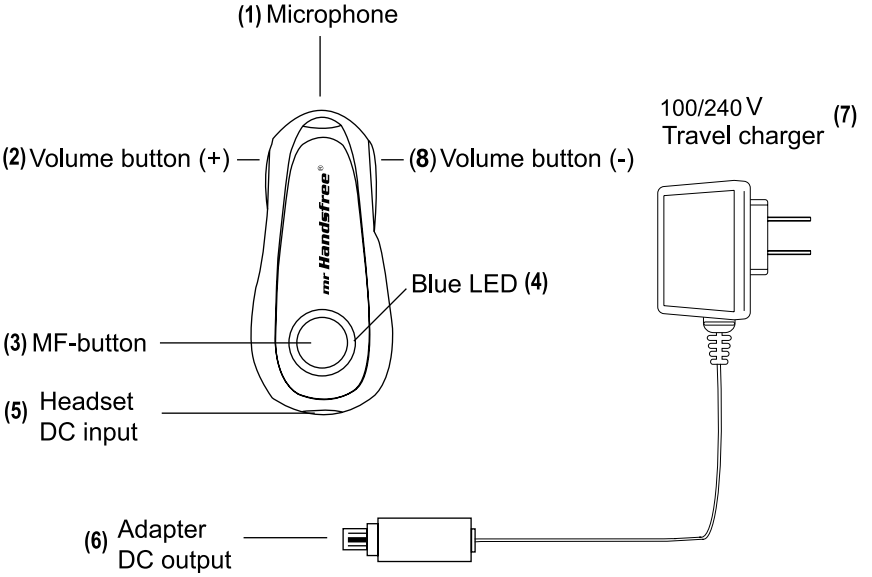
(1) Microphone
(2) Volume button (+)
(8) Volume button (-)
Blue LED (4)
(3) MF-button
(5) Headset
DC input
(6) Adapter
DC output
100/240 V
Travel charger
(7)
mr Handsfree

TABLE OF CONTENTS

GETTING STARTED 2
PAIRING THE HEADSET 3
MAKING AND ANSWERING / ENDING CALLS 3
TRANSFERRING / SWITCHING CALLS / PUTTING CALLS ON HOLD 4
CONNECTING WITH A PC OR PDA 4
TROUBLE SHOOTING 5
BLUETOOTH® 5

GETTING STARTED

CHARGING THE BATTERY

The mr Handsfree Blue Chameleon headset comes with a rechargeable battery included. For first time use, it takes about 24 hours to fully charge the battery. Afterwards, it takes about 2 hours to fully charge the battery. When the battery is fully charged, the talk time is 8 hours, and the stand-by time will be about 200 hours.

Plug the Travel Charger (7) into an AC outlet. ➙ Connect the adapter (6) into the headset (5) as shown in the picture. Gently press the adapter until it **clicks** into place. ➙ The blue indicator (4) on the headset will light up. ➙ When the battery is fully charged, the blue indicator (4) on the headset will turn off.

Note:

1. *When you hear 5 short beeps through the speaker of the headset, repeated every 20 seconds, the headset is running on low battery. Charge the headset for 2 hours until the blue indicator (4) will turn off.*
2. *The headset has to be recharged every two months, when it is not in use during a long time.*

MAIN FUNCTIONS MULTIFUNCTIONAL AND VOLUME BUTTONS & BLUE LED INDICATOR

MF-Button (3):

➙ Power on/off
➙ Answer / end / transfer calls / put calls on hold
➙ Pairing

Volume Button (2+8):

➙ Adjust volume
➙ Mute-function

Bleu LED indicator (4):

Headset action	Blue indicator
Power off	Off
Pairing-mode	Lights up constantly
Pairing succesful	Flashes 10 x quickly
Standby-mode	Flashes every 5 seconds
Charging battery	Lights up constantly
Battery charged	Off

TURNING THE HEADSET ON/OFF

To turn the headset on:

Press and hold the MF- button (3) for 3 seconds. ➙ You will hear a series of 4 tones (from low to high) and the blue indicator (4) of the headset flashes 2 times. ➙ The headset is now turned on.

To turn the headset off:

Press and hold the MF-button (3) for 5 seconds. ➙ You will hear a series of 4 tones (from high to low) and the blue indicator (4) of the headset turns off. ➙ The headset is now turned off.

PAIRING THE HEADSET

You are required to pair the Blue Chameleon headset with your mobile phone once before using it.
Each Blue Chameleon headset has a default PIN-code **0000** for pairing, which is stored in its internal memory. You are usually required to enter the PIN-code **0000** in a pairing process with a Bluetooth® mobile phone or other devices; however it depends on the kind of Bluetooth® device that the headset is connected to.

The Blue Chameleon headset must be turned off before initiating pairing. ➝ Press and hold the MF-button (3) until the blue indicator (4) lights up constantly. ➝ The headset is now ready for pairing. ➝ Initiate the pairing process on your Bluetooth® mobile phone to pair with the Blue Chameleon headset. (Refer to the manual of your mobile phone.) ➝ Select **Blue Ch-I** out of the list with found devices on your mobile phone. ➝ You will be asked to enter the PIN-code to complete pairing, enter **0000** and confirm it. ➝ When the pairing has been successful, the blue indicator (4) of the headset will flash 10 times quickly.

Note:

1. *If the Blue Chameleon headset is not in pairing mode, your mobile phone won't find the headset. Please set the headset into pairing mode before letting your mobile phone search for the headset.*
2. *If no pairing is possible for a period of time (approx. two minutes), the headset will automatically leave pairing mode. You may need to start all over again.*
3. *The Blue Chameleon headset can pair up to 8 devices. The different devices are stored in a list in the internal memory of the headset.*
   a. *If you wish to pair more than 8 devices, the less recent paired device will be automatically deleted from the list.*
   b. *All devices (max.8) that are on this list, can be connected to the headset.*
   c. *When turning on the headset, it will automatically connect to the device it was last connected with. If you want to connect the headset with another device of this list, you have to start the procedure from this device. This device then becomes the last connected device on the list.*
4. *Paired devices remain paired even when:*
   - *One of the devices is not turned on.*
   - *A service connection is interrupted or the service stopped.*
   - *One or both devices are rebooted.*

MAKING AND ANSWERING / ENDING CALLS

Once the Blue Chameleon headset is successfully paired with your mobile phone, you can use it to make and receive calls. The Blue Chameleon headset can be used with voice dialing if your mobile phone supports this feature. (Please check the manual of your mobile phone).

MAKING CALLS

Using voice dialing:

Press the MF-button (3), wait for a beep and say the name of the person you want to call. ➝ Press the MF-button (3) again to cancel voice dialing.

Using the phone keys to make a call:

Enter and dial the number on the mobile phone as you normally do. ➝ Once the call has been set up, the sound will be transmitted to your headset automatically.

Redial:
Press and hold the MF-button (3) for 3 seconds to redial the last number you called.

ANSWERING / ENDING CALLS
When the Blue Chameleon headset is turned on and there is an incoming call, you will hear a musical tone and the blue indicator (4) will change to a quick-flashing mode. → Press the MF-button (3) to answer the call or press and hold the MF-button (3) for 3 seconds to reject the call. → Adjust the headset volume by pressing the + button (2) to increase the volume and pressing the - button (8) to decrease the volume. → End the call by pressing the MF-button (3).

When the headset is turned off, press and hold the MF-button (3) for 3 seconds to turn the headset on. → The call will automatically be transferred to the headset.

Note:
Due to the different design of some mobile phones, an auto-disconnect may happen even when the Blue Chameleon headset is turned on. In that case, the headset won't ring when there is an incoming call. Press the MF-button (3) for 3 sec. to reconnect the headset with your mobile phone for an incoming call.

MUTE FUNCTION
During conversation, it is possible to mute the microphone.
Press and hold the Volume-button (2/8) until you hear a beep to activate the Mute function. → To disable the Mute function, press the Volume-button (2/8) once again until you hear a beep.

TRANSFERRING / SWITCHING CALLS / PUTTING CALLS ON HOLD

To transfer a call:
Press and hold the MF-button (3) until you hear a series of 4 tones (from high to low) to transfer the call to the mobile phone while talking on the headset. The headset will be turned off. → If you want to transfer the call back to the headset, press the MF-button (3) again for 3 seconds.

To switch to a second call:
Press and hold the MF-button (3) for 3 seconds to switch to a second call during a call. This function only works when your mobile phone service provider provides this service (check with your network provider).

To put a call on hold:
Press and hold the MF-button (3) for 3 seconds to put a call on hold. → Press and hold this button (3) once again for 3 seconds to continue the conversation.

CONNECTING WITH A PC OR PDA

You are allowed to connect the Blue Chameleon headset with a Bluetooth® enabled PC or PDA that is supported with Audio Gateway Profiles. Please refer to the user manual of your Bluetooth® enabled PC or PDA for setup information.

TROUBLE SHOOTING

1. You hear 5 quick beeps, repeated every 20 seconds.	The headset is running low on battery. Charge the headset for 2 hours until the blue LED indicator turns off.
2. No sound contact between the Blue Chameleon headset and other devices.	- Make sure that the two devices have been paired. - Make sure that the headset is turned on. - Make sure that the two devices are within a working range (10 m). - Make sure that your mobile phone is within signal strength. - Some Bluetooth® mobile phones can support only one Bluetooth® headset. Disconnection may happen when there is more than one headset paired with your mobile phone.
3. Several Bluetooth® devices appear on my mobile phone while searching the Blue Chameleon headset.	Most Bluetooth® enabled mobile phones with Bluetooth® function activated can search for more than one Bluetooth® device within operative range. The headset will appear as "Blue Ch-I" on your mobile phone after having been found by your mobile phone.
4. There is a disturbance noise coming from the Blue Chameleon headset.	The performance of the headset will be affected by two factors: - Whether your mobile phone is in a good signal area. If your mobile phone is in weak signal area, you won't hear clearly with the headset. - Whether it is in the operative range (10 m). The headset will automatically try to reconnect within 90 seconds.
5. The Blue Chameleon headset is turned on and is paired, but the blue LED indicator doesn't light up.	The blue LED indicator flashes in Standby-mode every 5 seconds. If after 5 minutes no action is taken, the blue LED indicator will turn off to save the battery. The LED will light again as soon as you press any key.

BLUETOOTH®

The *Bluetooth®* word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by TE-Group NV is under license. Other trademarks and trade names are those of their respective owners.

Waste electrical products must not be disposed of with household waste. This equipment should be taken to your local recycling centre for safe treatment.

Copyright © by TE-Group nv - Belgium